

Features


1. 400A ;  
Continuous 400A load.
2. ;  
It has one set of normally closed contact.

at23

Performance Parameters at23


Contact Arrangement	1B (1NC)	
	0.5m	
	80mV (at 400A)	
	6le, 1s	50ms
	-40 ~85	45ms
	M10	50Hz/60Hz 1500VAC/1min
	3.5g,10~200Hz,1/2	50Hz/60Hz 1500VAC/1min
	5 ~95 RH	100M 1min
	104x64.5x106.5mm	50M 1min
	20000	5g
	10-12N.m	
/	/	

# AZJ 400DB

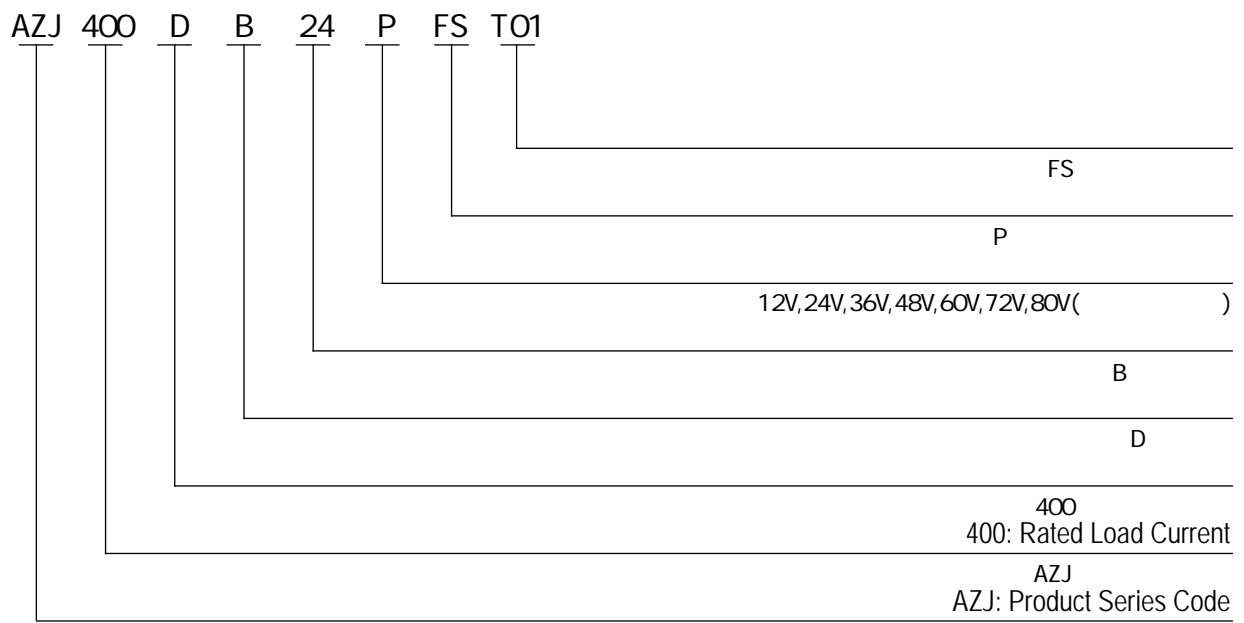

# Outline Installation Dimension Drawing

Without Auxiliary Switch

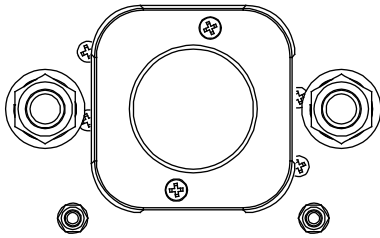

2-M10  
10-12N.m

2-M4  
1.2-2N.m 2.0N.m Max

With Auxiliary Switch

## Usage Cautions

1.

2.

to obtain more technical support.

3.

4.

5.

with thermal radiation. It is recommended to use it with a cooling fan.

6. 30cm

7.

8.

9.

10.

tion device.

11.

12.

It is strictly prohibited to wiring when power on.